

ARCHITECTURAL + UNGLAZED SERIES

ARCHITECTURAL+UNGLAZED

provides efficient anti-slip protection assuring safety and solidity. Thanks to its unglazed structure it is extremely durable and resistant to wear and tear in high traffic areas.

PRODUCT TYPE: Unglazed porcelain

COLOURS: Antrasit, Uni Black, Dark Grey and Light Grey

SIZES: 100x100mm, 200x200mm, and 100x200mm cove
Rectified Edges

FINISHES/USAGE:

Matt, Mercato and Diamond/Floor

AESTHETIC QUALITIES:

Unglazed porcelain for commercial use

ORIGIN:

Turkey


TECHNICAL DATA:

P3 Pendulum slip rating (Matt)
P5 Pendulum slip rating (Diamond)
P4 Pendulum slip rating (Mercato)
More technical data on last page

CERTIFICATIONS:



VARIATION:




V1

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.


ARCHITECTURAL + UNGLAZED SERIES

PRODUCT INFORMATION

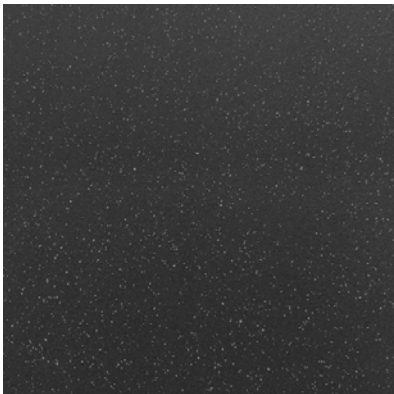

Arkitek C Dot Antrasit

Matt	100x100mm
Mercato	200x200mm
Cove	100x200mm

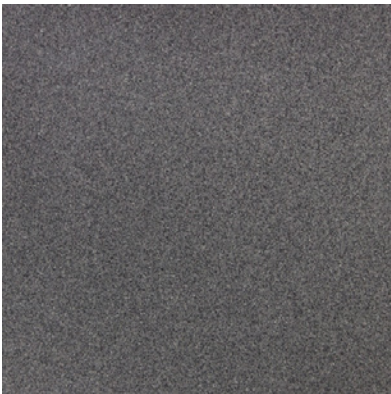


Arkitek Dotti Dark Grey

Matt	100x100mm
Mercato	200x200mm
Cove	100x200mm




Arkitek Dotti Light Grey

Matt	100x100mm
Mercato	200x200mm
Cove	100x200mm

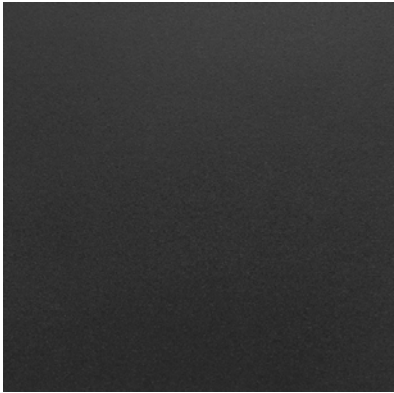


Arkitek Uni Black

Matt	100x100mm 200x200mm
Cove	100x200mm

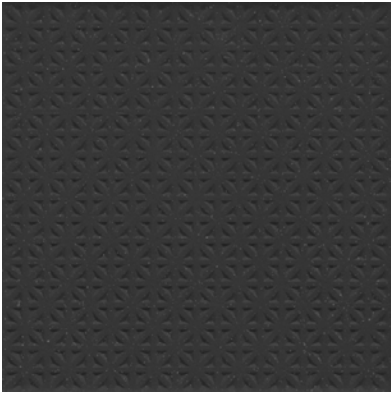

Arkitek C. Dot Antrasit

Diamond	200x200mm
---------	-----------

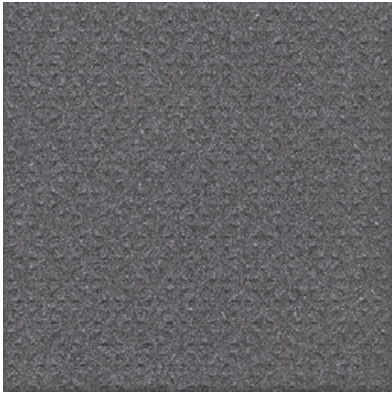

Arkitek Dotti Dark Grey

Diamond	200x200mm
---------	-----------

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

ARCHITECTURAL + UNGLAZED SERIES






LIFESTYLE IMAGES



Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

ARCHITECTURAL + UNGLAZED SERIES

TECHNICAL DATA

	technical characteristics	test method	required values	value
	water absorption	iso 10545-3	≤ 0,5%	≤ 0,5% (Approx. 0,05%)
	frost resistance	iso 10545-12	no alterations	resistant
	breaking strength (S)	iso 10545-4	Min. 1300N For thickness≥ 7,5mm Min. 700N For thickness<7,5mm	>700N (100x100mm) >1300N (200x200mm +300x300mm)
	thermal shock resistance	iso 10545-9	test method available	resistant
	stain resistance	iso 10545-14	test method available	class 3

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

ARCHITECTURAL + UNGLAZED SERIES

GREEN CERTIFICATIONS



The GREENGUARD Environmental Institute is an industry-independent organisation with a mission to improve indoor air quality and reduce people's exposure to chemicals and other pollutants. As an ISO-IEC Guide 65:1996 accredited, third-party organization, the GREENGUARD Environmental Institute certifies products and materials for low chemical emissions and provides a resource for choosing healthier products and materials for indoor environments. Certified products must meet chemical emissions standards based on established criteria from key public health agencies.



A European Union ecological quality mark that guarantees lower energy consumption in production processes, lower atmospheric and wastewater emissions, use of substances that are not dangerous for humans and the environment, use of quarries with correct environmental management, more effective consumer information and improved waste management.



ISO 14001:2015 specifies the requirements for an environmental management system that an organization can use to enhance its environmental performance. ISO 14001:2015 is intended for use by an organization seeking to manage its environmental responsibilities in a systematic manner that contributes to the environmental pillar of sustainability.