


FORNACE 2.0 SERIES

Boasting a beautiful textured surface, **FORNACE 2.0** captures the warm variations of natural terracotta and is suitable for wall and floor applications.

Available in contemporary sizes, this tile infuses spaces with sophisticated Mediterranean flair.

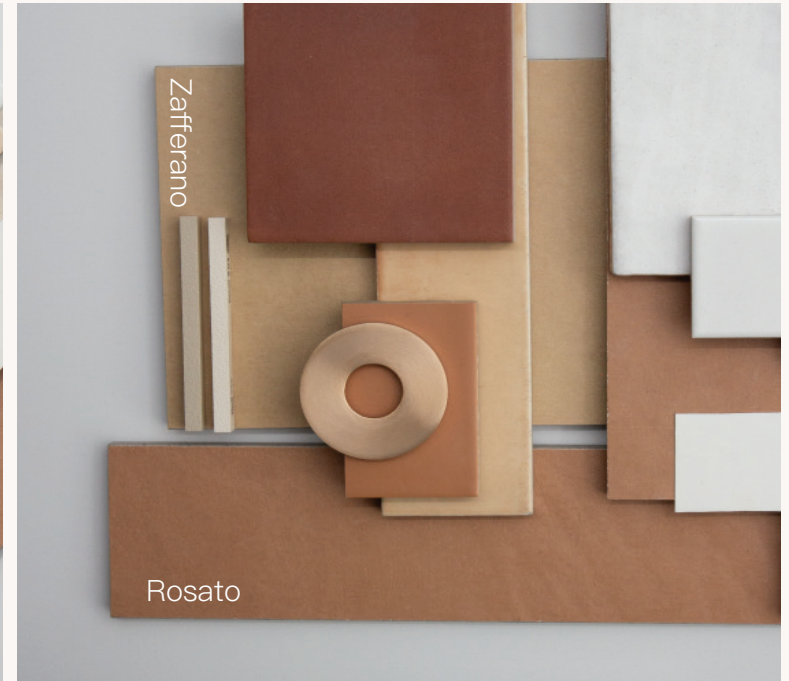

PRODUCT TYPE: Glazed porcelain

COLOURS: Bianco, Avorio, Zafferano and Rosato

SIZES: 75x300mm, 150x300mm and 600x600mm
Rectified Edges

FINISHES/USAGE:

AESTHETIC QUALITIES:


TECHNICAL DATA:

Matt/Wall and Floor

Soft textured surface and warm tones

P4 Pendulum Slip rating (Matt)
More technical data on last page

VARIATION:



V2

FORNACE 2.0 SERIES

PRODUCT INFORMATION



Blanco

Matt 75x300mm | 600x600mm




Avorio

Matt 75x300mm | 150x300mm
600x600mm



Zafferano

Matt 75x300mm | 150x300mm
600x600mm

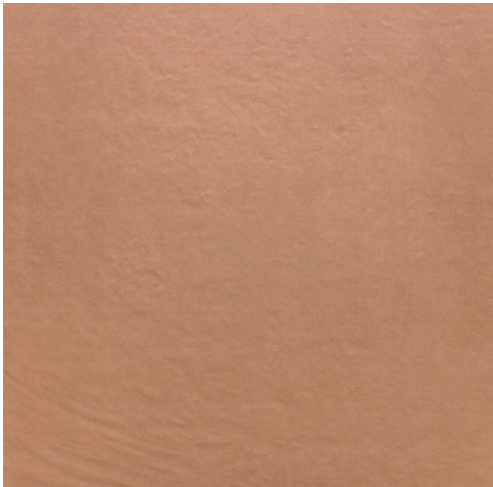

Rosato

Matt 75x300mm | 150x300mm
600x600mm

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

FORNACE 2.0 SERIES

LIFESTYLE IMAGES



Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

FORNACE 2.0 SERIES

LIFESTYLE IMAGES



Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

FORNACE 2.0 SERIES









LIFESTYLE IMAGES



Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

FORNACE 2.0 SERIES

TECHNICAL DATA

	technical characteristics	test method	required values	result
	water absorption	ISO 10545-3	$\leq 0.5\%$	$\leq 0.2\%$
	modulus of rupture	ISO 10545-4	$\geq 35 \text{ N/mm}^2$	compliant
	surface quality	ISO 10545-2	Complies with the standards	$\geq 95\%$
	thermal shock resistance	ISO 10545-9	No sample must show visible defects	compliant
	deep abrasion resistance	ISO 10545-6	$\leq 175 \text{ mm}^3$	compliant
	chemical resistance	ISO 10545-13	Declared value	compliant
	resistance to frost	ISO 10545-12	Resistant	compliant
	staining resistance	ISO 10545-14	Minimum Class 3	compliant